

VibroMet® 2

Vibratory Polisher



BUEHLER

Excellent Results. Easily Repeatable.™

The VibroMet® 2 Vibratory Polisher removes minor deformation remaining after mechanical preparation. It is designed to prepare high quality polished surfaces on a wide variety of materials and applications, including EBSD polishing preparation applications. The horizontal motion of 7200 cycles per minutes produces a very effective polishing action with superior quality results and exceptional flatness. The unique vibratory action produces less deformation, flatter surfaces and reduces edge rounding. It also yields a stress-free surface without the use of dangerous electrolytes and problems associated with electro-polishing or ion milling. A 12" (305mm) polishing bowl and transparent molded cover are standard on this unit. Accessories include a variety of specimen holders and weights. Target Holders can also be used.

Dimensions: 18" W x 22" D x 14" H (46 x 57 x 36cm)
Shipping Weight: 175 lbs. (80kg)

Ordering Information

The VibroMet® 2 Polisher includes RIM cabinetry, variable amplitude drive system, heavy duty cassis, electronic touch-pad controls including illuminated On/Off and variable vibration control, digital LED bar graph vibration amplitude indicator, 12" (305mm) diameter quick change PVC polishing bowl, and removable transparent molded cover. Includes samples of polishing cloths, MasterMet® 2, MasterPrep® Final Polishing Suspensions and operating instructions.

67-1635-160 VibroMet® 2 Vibratory Polisher, 115 VAC, 60 Hz, 1 phase
67-1635-250 VibroMet® 2 Vibratory Polisher, 220 VAC, 50Hz, 1 phase

Accessories

- 67-1525** Specimen Holders, 2" and 50mm, Set of 3
- 67-1526** Specimen Holders, 1" and 25mm, Set of 3
- 67-1527** Specimen Holders, 1¼" (32mm), Set of 3
- 67-1528** Specimen Holders, 1½" (38mm), Set of 3
- 67-1529** Specimen Weights, Set of 9
- 67-1540** Loading Fixture, 1" and 25mm, 1¼" (32mm), 1½" (38mm)
- 67-1541** Loading Fixture, 2" and 50mm
- 67-1530** Extra Polishing Bowl




Generous specimen capacity allows up to 18 specimens to be prepared simultaneously.



A variety of specimen holders and weights are available.



Large mounted specimens may be polished with ease. Once loaded, specimens require little operator attention.

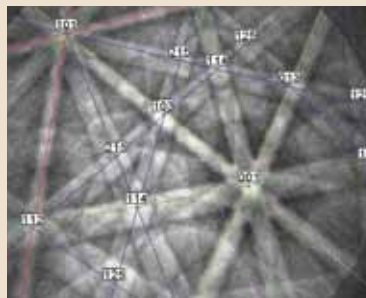

Left: Cartridge Brass, tint etched with Klemm's III, in cross polarized light with a sensitive tint filter. 50x. Right: Cartridge Brass indexed EBSD pattern. Quality Index: 221±8.6

For a complete listing of consumables, please refer to our Consumables Buyer's Guide. Buehler continuously makes product improvements; therefore, technical specifications are subject to change without notice.



BUEHLER



BUEHLER LTD.
 REGISTERED TO ISO 9004
 CERTIFICATE NO. 83104

BUEHLER®, a division of Illinois Tool Works Inc.
 – Worldwide Headquarters
 41 Waukegan Road
 Lake Bluff, Illinois 60044-1699 USA
 Tel: (847) 295-6500 • Fax: (847) 295-7979
 Sales: 1-800-BUEHLER (1-800-283-4537)
 www.buehler.com
 Email: info@buehler.com

BUEHLER GmbH - European and MESA Headquarters
 In der Steele 2 • 40599 Düsseldorf
 Telefon: (49) 211 974100 • Telefax: (49) 211 9741079
 www.buehler-met.de
 Email: info@buehler-met.de

BUEHLER FRANCE
 Téléphone: 0800 89 73 71
 Télécopie: 0800 88 05 27
 www.buehler.fr
 Email: info@buehler.fr

BUEHLER UNITED KINGDOM
 Telephone: 0800 707 6273
 Fax: 0800 707 6274
 www.buehler.co.uk
 Email: sales@buehler.co.uk

BUEHLER CANADA
 10 Carlow Court, Unit #2
 Whitby, Ontario L1N 9T7
 Telephone: (905) 430-4684
 Fax: (905) 430-4647
 Sales Telephone: 1-800-268-3593
 Email: info@buehler.ca

BUEHLER, ASIA-PACIFIC
 5/F Vogue Centre
 696 Castle Peak Road
 Lai Chi Kok, Kowloon
 Hong Kong, SAR, China
 Telephone: (852) 2307 0909
 Fax: (852) 2307 0233